

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number
WO 2004/027257 A1

(51) International Patent Classification⁷:
15/00, 15/08

F03B 13/26,

(74) Agent: **VINSOME, Rex, Martin;** Urquhart-Dykes &
Lord, St Nicholas Chambers, Amen Corner, Newcas-
tle-upon-Tyne, NE1 1PE (GB).

(21) International Application Number:

PCT/GB2003/003904

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:

10 September 2003 (10.09.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0221896.4 20 September 2002 (20.09.2002) GB

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **SOIL
MACHINE DYNAMICS LIMITED** [GB/GB]; Win-
comblee Road, Newcastle Upon Tyne NE6 3QS (GB).

Published:


— with international search report

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **MANCHESTER,
Jonathan, Ralph** [GB/GB]; 2 Cowell Grove, Rookwood,
Rowlands Gill NE39 2JQ (GB).

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: APPARATUS FOR GENERATING ELECTRICAL POWER FROM TIDAL WATER MOVEMENT

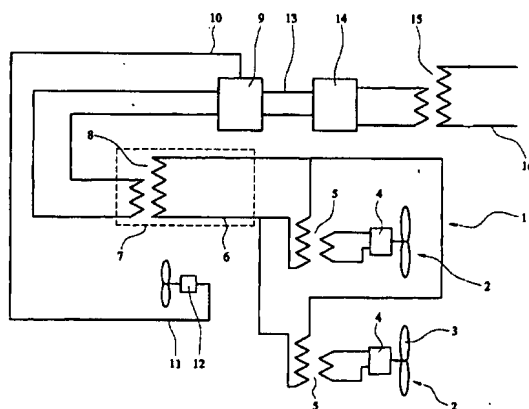

(57) Abstract: A tidally driven electricity generator (1) has a series of turbines (2), each of which is mounted under water in an offshore location. Each turbine (2) has blades (3) which are rotated by tidal flow of water, to power a respective generator (4), which outputs AC electrical power via a respective transformer (5) to a cable (6) and appropriate switchgear (7). The cable (6) is connected to a further transformer (8) located onshore, and the transformer (8) is connected to two AC inputs of a drive (9) containing an AC/DC converter, one input (10) of which is connected via a cable to a control feedback device (11). The control feedback device (11) may be a flow meter which determines the velocity of the tidal flow, or may contain look-up tables containing information relating to the velocity of tidal flow at any particular time. The drive (9) outputs DC electrical signals along cabling (13) to DC/AC converter (14), which outputs AC electrical power via transformer (15) to a fixed frequency local supply grid (16). The drive (9) also controls the speed of rotation of each turbine (2) by adjustment of the frequency of signals output to the turbines from the drive (9) via switchgear (7).

WO 2004/027257 A1

APPARATUS FOR GENERATING ELECTRICAL POWER
FROM TIDAL WATER MOVEMENT

The present invention relates to an apparatus for generating electrical power from tidal water movement, and relates particularly, but not exclusively, to an apparatus for supplying electrical power of a fixed frequency to a grid of a frequency different from that of electrical power output by individual generators.

It is known to generate electrical power by means of so-called wind farms, in which a series of turbines is each driven by wind power to produce electrical output power. The efficiency of operation of any particular turbine of such a wind farm is determined by the angle of incidence of fluid driving the turbine with the turbine blades, and has a maximum value for any given speed of rotation of the turbines.

It is known to control the efficiency of turbines of wind farms by controlling the angle of incidence by adjusting the pitch of the turbine blades, or by adjusting the speed of rotation of the turbine blades relative to the stator of each turbine.

There is presently considerable interest in producing electrical power from tidal water movement, especially in countries having relatively long coastlines, such as the United Kingdom. Tidally driven turbines are generally submerged offshore, and are controlled by means of control apparatus located in offshore towers extending above each turbine, for example as shown in documents accompanying the presentation "Tidal Turbine Technology", Peter Fraenkel, Creating an All-Energy Future, Aberdeen, 27 to 28 February 2001.

However, known tidally driven turbines of this type suffer from the drawback that maintenance and repair of electrical control apparatus located in an offshore tower is both difficult and expensive, and the electrical insulation required to prevent ingress of seawater into the control apparatus also increases the cost of the apparatus. Furthermore, there are considerable difficulties associated with applying the known techniques used in wind farms to tidally driven turbines. In particular, turbines having blades of variable pitch are complex and expensive to manufacture, and arrangements used in wind farms in which electrical control equipment is mounted to each generator are very expensive to apply to tidally driven turbines, in which the control apparatus must be located offshore and protected from the marine environment.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to an aspect of the present invention, there is provided an apparatus for generating electrical power from tidal water movement, the apparatus comprising:-

at least one electrical turbine adapted to be driven by tidal water movement to generate a respective first electrical signal; and

drive means located remotely from the or each said turbine for receiving the or each said first electrical signal, controlling the speed of rotation of the or each said turbine to adjust the efficiency thereof, and outputting at least one second electrical signal to supply electrical power generated by the or each said turbine.

By providing control means located remotely from the or each turbine, this provides the advantage that in the case of tidally-driven turbines being located offshore, the electrical control components can be located onshore. This significantly reduces the cost and difficulty in maintaining and repairing the apparatus, and also significantly reduces the degree of electrical insulation needed to protect the control components. Furthermore, the present invention is based on the surprising discovery that although the speed of tidal water flow varies significantly over time, at a given time the speed does not vary significantly over the area occupied by an installation of several turbines. This enables several turbines to be controlled by a single controlling device located onshore and connected to the turbines by a single cable. This in turn makes the present invention significantly more cost effective than the prior art.

The apparatus of the present invention also has the advantage that it is of significantly simpler construction and maintenance than a conventional apparatus having turbine blades of variable pitch, which significantly reduces the cost of apparatus of the invention compared with such prior art apparatus. Furthermore, by having drive means located remotely from the turbines, it is possible to provide additional drives to add redundancy to the apparatus, and by selectively connecting the additional drives to one or more of the turbines, as opposed to providing additional drives for each turbine, this enables the redundancy to be added more cost effectively.

The apparatus may further comprise feedback means for providing at least one first control signal for use in controlling the speed of rotation of the or each said

turbine by said drive means to adjust the efficiency thereof.

In a preferred embodiment, the apparatus further comprises control means for receiving the or each said second electrical signal and outputting at least one third electrical signal to supply electrical power generated by the or each said turbine, wherein said control means is adapted to control the frequency of the or each said third electrical signal.

This provides the advantage of enabling the efficiency of the or each said turbine to be maximised, while at the same time enabling electrical power generated by the or each said turbine to be transferred efficiently to a supply grid of fixed frequency.

The feedback means may be adapted to apply at least one said first control signal responsive to the frequency of at least one said third electrical signal.

The feedback means may be adapted to apply at least one said control signal, responsive to the velocity of said tidal water movement, to said control means.

This provides the advantage of enabling the efficiency of the or each said turbine to be controlled as the velocity of tidal water movement varies with time.

The apparatus may further comprise AC/DC converter means for receiving the or each said first electrical signal and outputting DC signals to said drive means in response thereto.

The apparatus may further comprise DC/AC converter means for receiving the or each said second electrical signal and outputting said third electrical signals in response thereto.

The drive means may be adapted to control the speed of rotation of at least one said turbine to limit the efficiency thereof.

This provides the advantage of protecting the apparatus from damage in the event of excessive energy output by one or more turbines.

The drive means may be adapted to cause rotation of at least one said turbine from standstill thereof.

This provides the advantage of assisting the turbine to overcome frictional forces during starting thereof.

According to another aspect of the present invention, there is provided a method of generating electrical power from tidal water movement, the method comprising:-

causing at least one electrical turbine to be driven by tidal water movement to generate a respective first electrical signal;

controlling the speed of rotation of the or each said turbine by means of drive means located remotely from the or each said turbine to control the efficiency thereof; and

outputting at least one second electrical signal from said drive means to supply electrical power generated by the or each said turbine.

The method may further comprise the step of controlling the speed of rotation of the or each said turbine in response to the frequency of at least one electrical signal output by said drive means.

The method may further comprise the step of controlling the speed of rotation of the or each said turbine in response to the velocity of said tidal water movement.

The method may further comprise the step of controlling the speed of rotation of at least one said turbine to limit the efficiency thereof.

The method may further comprise the step of using said drive means to cause rotation of at least one said turbine from standstill thereof.

A preferred embodiment of the invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawing in which:-

Figure 1 is a schematic view of a tidally operated electricity generator embodying the present invention.

Referring to Figure 1, a tidally driven electricity generator 1 has a series of turbines 2, each of which is mounted under water in an offshore location, for example suspended from floating buoys or anchored by cables to the sea bed, using methods which will be familiar to persons skilled in the art. Each turbine 2 has blades 3 which are rotated by tidal flow of water, to power a respective generator 4, which outputs AC electrical power via a respective transformer 5 to a cable 6 and appropriate switchgear 7.

The cable 6 is connected to a further transformer 8 located onshore, and the transformer 8 is connected to two AC inputs of a drive 9 containing an AC/DC converter, one input 10 of which is connected via a cable to a control feedback device 11. The control feedback device 11 may be a flow meter which determines the velocity of the tidal flow, or may contain look-up tables containing information relating to the velocity of tidal flow at any particular time.

The drive 9 outputs DC electrical signals along cabling 13 to DC/AC converter 14, which outputs AC electrical power via transformer 15 to a fixed frequency local supply grid 16. The drive 9 also controls the speed of rotation of each turbine 2 by adjustment of the frequency of signals output to the turbines from the drive 9 via switchgear 7, in a manner which will be familiar to persons skilled in the art.

The operation of the apparatus shown in Figure 1 will now be described.

The speed of tidal water flow through the individual turbines 2 does not vary significantly between individual turbines at a given time, although it will be appreciated by persons skilled in the art that this speed can vary significantly over time. The efficiency of operation of each turbine is controlled by controlling the speed of rotation of each turbine, which in turn controls the angle of incidence between fluid driving the turbine and the blades 3 of the turbine.

When the speed of rotation of each turbine 2 has been set, by means of a controller in the drive 9, to operate at a given efficiency, the frequency of electricity output by each generator 4 depends upon that speed of rotation, and will be generally the same for all of the turbines. The

electrical output signals are then input to drive 9 and are output via DC/AC converter 14 and transformer 15 to the local grid 16. However, because the frequency of the electrical signals output by the turbines 2 can be different from that of the grid 16, the controller in drive 19 can vary the frequency of electrical signals output at cabling 13. As a result, the frequency of AC electrical power supplied by transformer 15 to the local supply grid 16 can be matched to that of the grid 16 for optimum power transfer. The drive 9 may be controlled by a feedback loop (not shown) matching the output frequency of DC/AC converter 14 to the grid 16.

In addition to controlling the speed of rotation of the turbines 2 during normal operation so that they operate at maximum efficiency, the drive 9 may also be used to drive the turbines 2 during start-up of the generator to assist in overcoming frictional forces. Furthermore, in order to prevent damage to the generator caused by excessive power output, the drive 9 may also adjust the speed of rotation of each turbine to limit the efficiency of operation of the turbines.

It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only, and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims. For example, it will be appreciated that the present invention can be used with turbines having blades of variable as well as fixed pitch.

CLAIMS

1. An apparatus for generating electrical power from tidal water movement, the apparatus comprising:-

at least one electrical turbine adapted to be driven by tidal water movement to generate a respective first electrical signal; and

drive means located remotely from the or each said turbine for receiving the or each said first electrical signal, controlling the speed of rotation of the or each said turbine to adjust the efficiency thereof, and outputting at least one second electrical signal to supply electrical power generated by the or each said turbine.

2. An apparatus according to claim 1, further comprising feedback means for providing at least one first control signal for use in controlling the speed of rotation of the or each said turbine by said drive means to adjust the efficiency thereof.

3. An apparatus according to claim 1 or 2, further comprising control means for receiving the or each said second electrical signal and outputting at least one third electrical signal to supply electrical power generated by the or each said turbine, wherein said control means is adapted to control the frequency of the or each said third electrical signal.

4. An apparatus according to claims 2 and 3, wherein said feedback means is adapted to apply at least one said first control signal responsive to the frequency of at least one said third electrical signal.

5. An apparatus according to any one of claims 2 to 4, wherein said feedback means is adapted to apply at least one said control signal, responsive to the velocity of said tidal water movement, to said control means

6. An apparatus according to any one of the preceding claims, further comprising AC/DC converter means for receiving the or each said first electrical signal and outputting DC signals to said drive means in response thereto.

7. An apparatus according to claim 6, further comprising DC/AC converter means for receiving the or each said second electrical signal and outputting said third electrical signals in response thereto.

8. An apparatus according to any one of the preceding claims, wherein said drive means is adapted to control the speed of rotation of at least one said turbine to limit the efficiency thereof.

9. An apparatus according to any one of the preceding claims, wherein said drive means is adapted to cause rotation of at least one said turbine from standstill thereof.

10. An apparatus for generating electrical power from tidal water movement, the apparatus substantially as hereinbefore described with reference to the accompanying drawing.

11. A method of generating electrical power from tidal water movement, the method comprising:-

causing at least one electrical turbine to be driven by tidal water movement to generate a respective first electrical signal;

controlling the speed of rotation of the or each said turbine by means of drive means located remotely from the or each said turbine to control the efficiency thereof; and

outputting at least one second electrical signal from said drive means to supply electrical power generated by the or each said turbine.

12. A method according to claim 11, further comprising the step of controlling the speed of rotation of the or each said turbine in response to the frequency of at least one electrical signal output by said drive means.


13. A method according to claim 11 or 12, further comprising the step of controlling the speed of rotation of the or each said turbine in response to the velocity of said tidal water movement.

14. A method according to any one of claims 11 to 13, further comprising the step of controlling the speed of rotation of at least one said turbine to limit the efficiency thereof.

15. A method according to any one of claims 11 to 14, further comprising the step of using said drive means to cause rotation of at least one said turbine from standstill thereof.

16. A method of generating electrical power from tidal water movement, the method substantially as hereinbefore described with reference to the accompanying drawing.

-1/1-

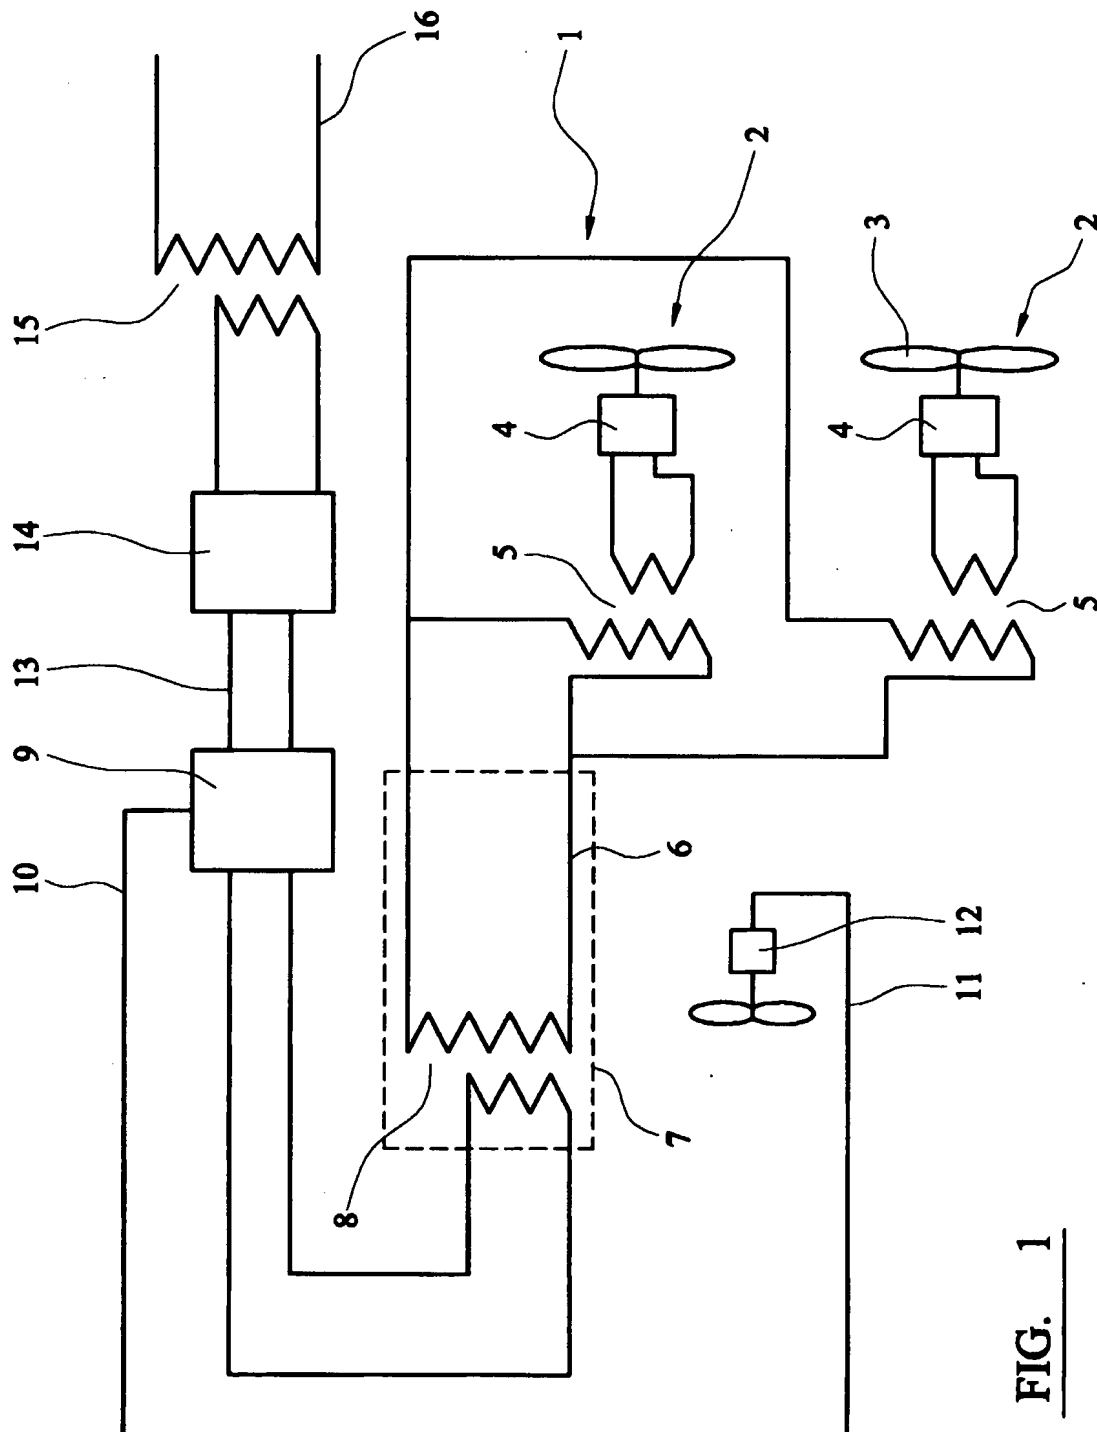

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 03/03904

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F03B13/26 F03B15/00 F03B15/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, COMPENDEX, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 01 34973 A (PAS PETER ALEXANDER JOSEPHUS) 17 May 2001 (2001-05-17) page 1, line 2 page 4, line 9 - line 22 page 6, line 13,14; figures 2,3	1-5,8, 10-14,16
Y	---	6,7
Y	---	9,15
Y	GB 2 348 250 A (I T POWER LIMITED) 27 September 2000 (2000-09-27) abstract page 10, line 3 - line 9 page 10, line 29 -page 11, line 26; figures 6,7 --- -/--	1-5,8, 10-14,16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

18 December 2003

Date of mailing of the international search report

12/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Criado Jimenez, F

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/03904

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 02 057623 A (OCEAN POWER TECHNOLOGIES INC) 25 July 2002 (2002-07-25) page 9, paragraph 5 -page 13, paragraph 1; figures 5,5A ----	6,7
Y	FR 2 324 895 A (NEYRPIC CREUSOT LOIRE) 15 April 1977 (1977-04-15) claim 1 ----	9,15
A	US 5 440 176 A (HAINING MICHAEL L) 8 August 1995 (1995-08-08) column 2, line 23 - line 32; figures ----	1
A	US 4 754 156 A (BANDO AKIRA ET AL) 28 June 1988 (1988-06-28) column 3, line 35 -column 4, line 34 -----	2-5

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/03904

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0134973	A	17-05-2001	NL 1013559 C2	28-05-2001
			AU 1742101 A	06-06-2001
			CA 2391538 A1	17-05-2001
			EP 1228309 A1	07-08-2002
			WO 0134973 A1	17-05-2001
			NL 1013559 A1	18-05-2001
GB 2348250	A	27-09-2000	AU 766741 B2	23-10-2003
			AU 2681900 A	14-09-2000
			CA 2367715 A1	31-08-2000
			EP 1183463 A1	06-03-2002
			WO 0050768 A1	31-08-2000
			US 6652221 B1	25-11-2003
WO 02057623	A	25-07-2002	EP 1364124 A1	26-11-2003
			WO 02057623 A1	25-07-2002
			US 2003001392 A1	02-01-2003
FR 2324895	A	15-04-1977	FR 2324895 A1	15-04-1977
			BR 7604225 A	05-04-1977
US 5440176	A	08-08-1995	AU 687629 B2	26-02-1998
			AU 3423895 A	02-05-1996
			CA 2160756 A1	19-04-1996
			EP 0708241 A2	24-04-1996
			JP 8210237 A	20-08-1996
			NO 954156 A	19-04-1996
US 4754156	A	28-06-1988	JP 2585233 B2	26-02-1997
			JP 63100276 A	02-05-1988
			CA 1266506 A1	06-03-1990

Form PCT/ISA/210 (patent family annex) (July 1992)